

HARDI PUMP 463



General specifications

- High capacity six diaphragm positive displacement radial pump with base plate.
- Self-priming.
- Can be run dry.
- Can rotate clockwise or anticlockwise.
- One grease point for lubrication.
- Dry sump to simplify maintenance.
- No special tools needed for maintenance.
- Polyurethane diaphragms and seals.
- Cast iron crankcase and covers.
- Stainless steel bolts and plates for diaphragms.
- 2" suction port, 1¹/₄" pressure port.
- Hydraulic drive kit available.

463/5.5 (Ref. no. 821650)

- 21-splined 1³/₈" through shaft, for tractor use.
- Normal operating revolutions, 1000 r/min.
- Maximum pressure, 15 bar / 220 PSI.
- Maximum vacuum, 0.40 bar / 5.9 PSI.
- Weight, 66.5 kg / 147 lb.
- Offset Ports

463/5.5 (Ref. no. 821585)

- 21-splined 1³/₈" shaft, for tractor use.
- Normal operating revolutions, 1000 r/min.
- Maximum pressure, 15 bar / 220 PSI.
- Maximum vacuum, 0.40 bar / 5.9 PSI.
- Weight, 67.0 kg / 148 lb.

463/10.0 (Ref. no. 821612)

- 6-splined 1³/₈" shaft, for tractor use.
- Normal operating revolutions, 540 r/min.
- Maximum pressure, 15 bar / 220 PSI.
- Maximum vacuum, 0.58 bar / 8.5 PSI.
- Weight, 66.5 kg / 147 lb.
- Offset Ports

463/10.0 (Ref. no. 821587)


- 6-splined 1³/₈" through shaft, for tractor use.
- Normal operating revolutions, 540 r/min.
- Maximum pressure, 15 bar / 220 PSI.
- Maximum vacuum, 0.58 bar / 8.5 PSI.
- Weight, 66.9 kg / 148 lb.

463/12.0 (Ref. no. 821649)

- 6-splined 1³/₈" shaft, for tractor use.
- Normal operating revolutions, 540 r/min.
- Maximum pressure, 15 bar / 220 PSI.
- Maximum vacuum, 0.58 bar / 8.5 PSI.
- Weight, 66.7 kg / 147 lb.
- Offset Ports



463 with hydraulic drive

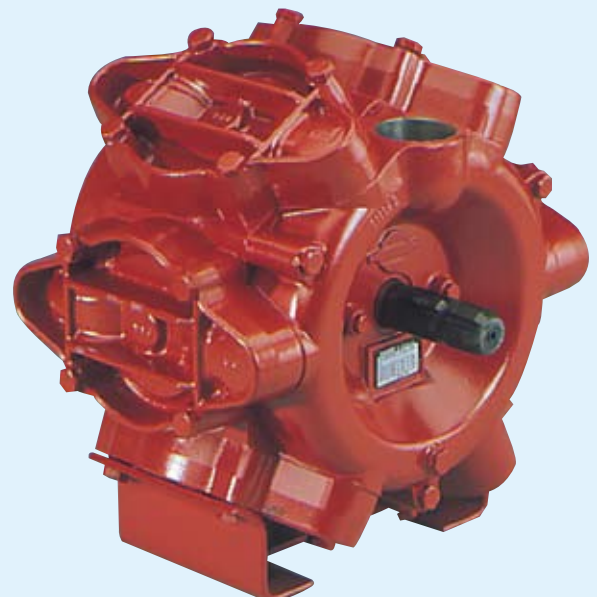

463 with splined shaft